

CHRONO CARBON RR, CARBON/BLEU/BLEU, 2021

obj. č: 010.21021



Sugerowana cena

15.599 zł

Specyfikacje techniczne

produkowane rozmiary S 395mm / M 430mm / L 470mm / XL 520mm	waga 10,2 Kg
rama Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design	widelec Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
stery Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45	przerzutka Shimano XT M8100, SGS, Shadow+, 12s
manetki Shimano Deore M6100, Rapid Fire Plus, 12s	klamki hamulca Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings
uchwyty Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm	support Shimano XT MT800 BSA, 68/73mm
kierownica Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL /	mostek MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm
sztyca Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	siodełko Mondraker XC Series, steel rail
piasta przednia DT 370, Boost 15x110mm, IS 6 bolts	tylna piasta DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub
łańcuch Shimano Deore M6100, 12s, Quick-link	kaseta Shimano Deore M6100, 10-51T Hyperglide+, 12s
szprychy DT Champion, straightpull	rafki DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes
obudowa Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	zamówienie numer 010.21021

przedni hamulec
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


tylny hamulec
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

owijka
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

korba
34T, CNC-machined alloy

mocowanie przerzutki
Mondraker M068

Geometria

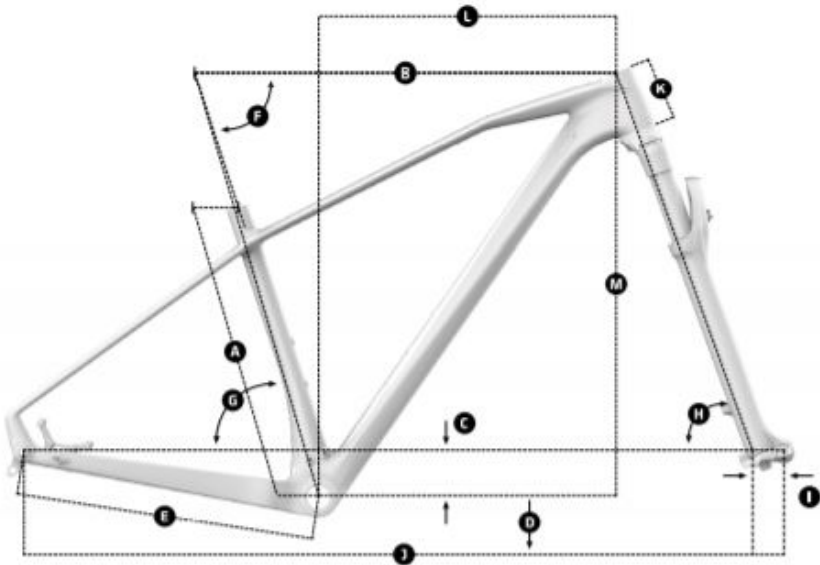

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm