

CRAFTY CARBON RR, BLUE/WHITE/ORANGE, 2021

obj. č: 010.21263



Sugerowana cena

46.799 zł

Specyfikacje techniczne

produkowane rozmiary

S 380mm / M 420mm / L 450mm / XL 490mm

waga

21,5 Kg

rama

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

widelec

Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

stery

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

przerzutka

Shimano XT M8100, SGS, Shadow+, 12s

manetki

Shimano XT M8100, Rapid Fire Plus, 12s

klamki hamulca

Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust

uchwyty

E.13 TRS Race carbon ebike, 165mm

kierownica

Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

mostek

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbore

szttyca

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

siodełko

Fizik Antares R7

piasta przednia

DT 240, Boost 15x110mm, CenterLock

tylna piasta

DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock

łańcuch

Shimano XT M8100, 12s, Quick-link

kaseta

Shimano XT M8100 10-51T Hyperglide+, 12s

szprychy

DT Hybrid SP, straightpull

rafki

DT Swiss HX1501 Spline One 29, 30mm internal width, tubeless ready, 28 spokes

obudowa

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

zamówienie numer


010.21263

amortyzator

Fox Float DPS Factory Kashima, 205x65mm. Settings: Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

przedni hamulec Shimano XT M8120, 4 piston caliper, MT800 ICE-Tech 203mm CenterLock rotor, resin pads with fin	tylny hamulec Shimano XT M8120, 4 piston caliper, MT800 ICE-Tech 203mm CenterLock rotor, resin pads with fin
owijka Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead	regulacja amortyzatora Medium compression, Medium rebound, 0.4 volume spacer
korba Shimano E8000 34T, steel, 104 BCD	mocowanie przerzutki Mondraker M068
silnik + akumulator Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh	

Geometria

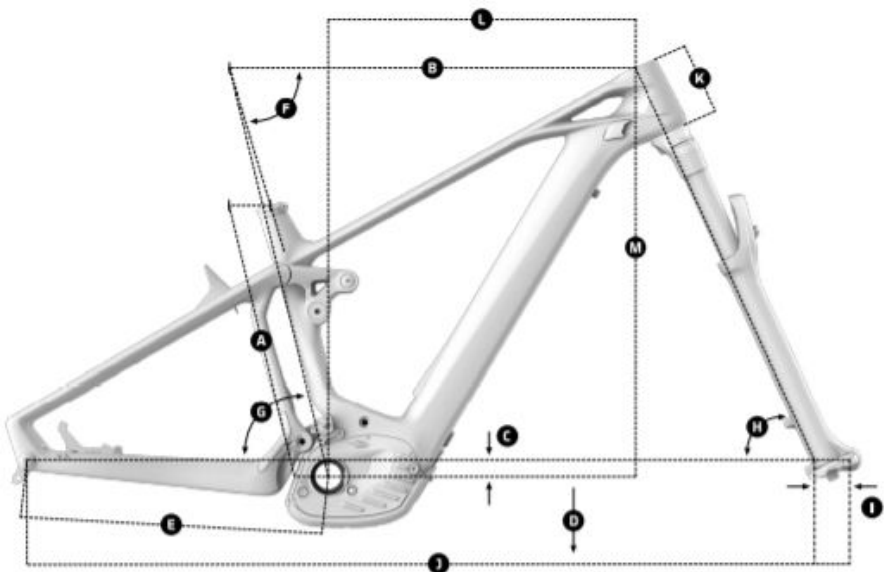

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1270 mm	1290 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm