

# PRIME, BLACK/RED, 2021

obj. č: 010.21216

Sugerowana cena

**18.199 zł**




## Specyfikacje techniczne

|                                                                                                                                                                                  |                                                                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>produkowane rozmiary</b><br>XS 380mm / S 390mm / M 430mm / L 470mm / XL 510mm                                                                                                 | <b>waga</b><br>21,9 Kg                                                                                                                                                                                              |
| <b>rama</b><br>Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor | <b>widelec</b><br>RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload |
| <b>stery</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                              | <b>przerzutka</b><br>Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                                                                      |
| <b>manetki</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click                                                                                                      | <b>klamki hamulca</b><br>Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings                                                                                                             |
| <b>uchwyty</b><br>Race Face Aeffect ebike, 165mm                                                                                                                                 | <b>kierownica</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm                                                        |
| <b>mostek</b><br>Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare                                                                                                       | <b>szttyca</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm                                                                                                                         |
| <b>siodełko</b><br>Mondraker e-MTB custom design                                                                                                                                 | <b>piasta przednia</b><br>Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts                                                                                                                                |
| <b>tylna piasta</b><br>Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts                                                                                                | <b>łańcuch</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                                                                     |
| <b>kaseta</b><br>Sram PG-1210, 11-50T, 12s                                                                                                                                       | <b>szprychy</b><br>CN round stainless steel                                                                                                                                                                         |
| <b>rafki</b><br>MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes                                                                                                       | <b>obudowa</b><br>Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead                                                                                                           |
| <b>zamówienie numer</b><br>010.21216                                                                                                                                             | <b>przedni hamulec</b><br>Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad                                                                                      |
| <b>tylny hamulec</b><br>Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad                                                     | <b>owijka</b><br>Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead                                                                                                            |
| <b>korba</b><br>Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD                                                                                                             | <b>mocowanie przerzutki</b><br>Mondraker M068                                                                                                                                                                       |

**silnik + akumulator**  
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer  
Bosch Purion, Bosch Powertube 625Wh

Geometria

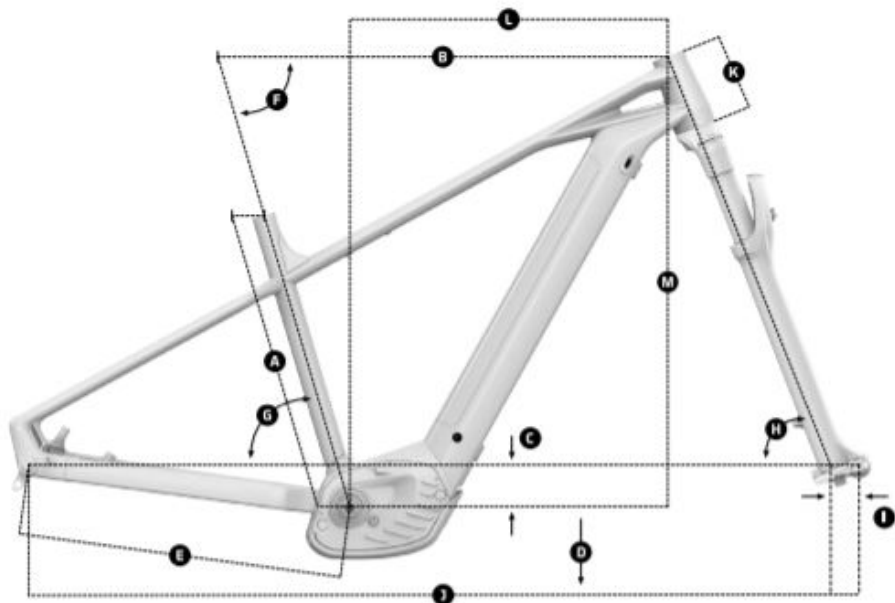

GEOMETRY

| Size                         | XS     | S       | M       | L       | XL      |
|------------------------------|--------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm | 390 mm  | 430 mm  | 470 mm  | 510 mm  |
| B Top Tube Length            | 600 mm | 615 mm  | 645 mm  | 670 mm  | 700 mm  |
| C Bottom Bracket Drop        | -60 mm | -60 mm  | -60 mm  | -60 mm  | -60 mm  |
| D Bottom Bracket Height      | 318 mm | 318 mm  | 318 mm  | 318 mm  | 318 mm  |
| E Chainstay Legth            | 455 mm | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°  | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| G Seat Tube Angle, Effective | 73.5°  | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| H Head Tube Angle            | 69°    | 69°     | 69°     | 69°     | 69°     |
| I Fork Offset                | 51 mm  | 51 mm   | 51 mm   | 51 mm   | 51 mm   |
| J Wheelbase                  | 1138mm | 1153 mm | 1183 mm | 1210 mm | 1240 mm |
| K Head Tube Length           | 110 mm | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 410 mm | 425 mm  | 455 mm  | 480 mm  | 505 mm  |
| M Stack                      | 640 mm | 640 mm  | 640 mm  | 658 mm  | 658 mm  |