

CHRONO CARBON, CARBON/ORANGE/GREY, 2021

obj. č: 010.21013

Sugerowana cena

10.919 zł

Aktualna cena

9.899 zł



Specyfikacje techniczne

produkowane rozmiary

S 395mm / M 430mm / L 470mm / XL 520mm

waga

11,3 Kg

rama

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

widelec

RockShox Judy Gold RL 29, 100mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 30mm aluminum stanchions, offset 51mm. Settings: Onelock 2 pos remote compression (open/lock), rebound, air preload

stery

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

przerzutka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

manetki

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

klamki hamulca

Sram Level, tooled reach adjust, lever pivot bushings

uchwyty

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

support

Sram DUB BSA, sealed bearings, 73mm

kierownica

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

mostek

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

sztyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

siodełko

Mondraker XC Series, steel rail

piasta przednia

Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts

tylna piasta

Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts

łańcuch

Sram SX Eagle, 12s, Powerlock

kaseta

Sram PG-1230, 11-50T, 12s

szprychy

CN round stainless steel

rafki

MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes

obudowa

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

zamówienie numer

010.21013

przedni hamulec

Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

tylny hamulec

Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

owijka

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead


korba

34T, steel, X-Sync 2

mocowanie przerzutki

Mondraker M068

Geometria

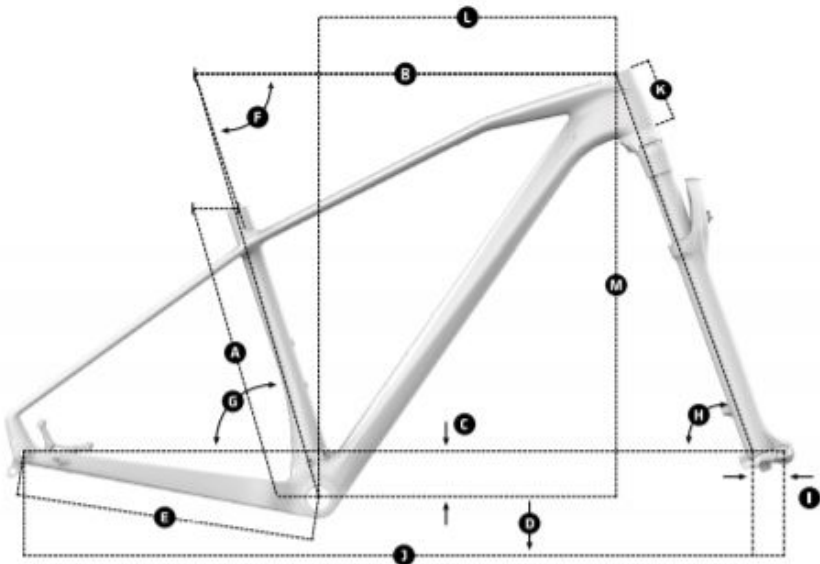

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm