

PODIUM CARBON R, CARBON/YELLOW/GREEN, 2021


obj. č: 010.21025



Specyfikacje techniczne

produkowane rozmiary S 390mm / M 420mm / L 470mm / XL 510mm	waga 8,9 Kg
rama Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,	widelec Fox 32 29 Float FIT4 EVOL Step Cast Factory Kashima, 100mm, tapered steerer tube, 15x110mm Boost axle, remote lockout, offset 44mm. Settings: lockout, compression micro-adjustment at low-speed, rebound, air preload
stery Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45	przerzutka Shimano XT M8100, SGS, Shadow+, 12s
manetki Shimano SLX M7100, Rapid Fire Plus, 12s	klamki hamulca Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust
uchwyty Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm	support Shimano XT MT800 BSA, 68/73mm
kierownica Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm	mostek MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm
sztyca Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm	siodełko Fizik Antares R7
piasta przednia DT 350, Boost 15x110mm, CenterLock	tylna piasta DT 350, Boost 12x148mm, 36T SL Ratchet system, CenterLock, MS freehub
łańcuch Shimano Deore M6100, 12s, Quick-link	kaseta Shimano SLX M7100 10-51T Hyperglide+, 12s
szprychy DT Competition, straightpull	rafki DT Swiss XR1700 Spline 29, 25mm internal width, welded aluminum, tubeless ready, 28 spokes
obudowa Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	zamówienie numer 010.21025
przedni hamulec Shimano XT M8100, MT800 ICE-Tech 160mm CenterLock rotor, resin pads	tylny hamulec Shimano XT M8110, MT800 ICE-Tech 160mm CenterLock rotor, resin pads, Flatmount
owijka Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	korba 34T, CNC-machined alloy

Geometria

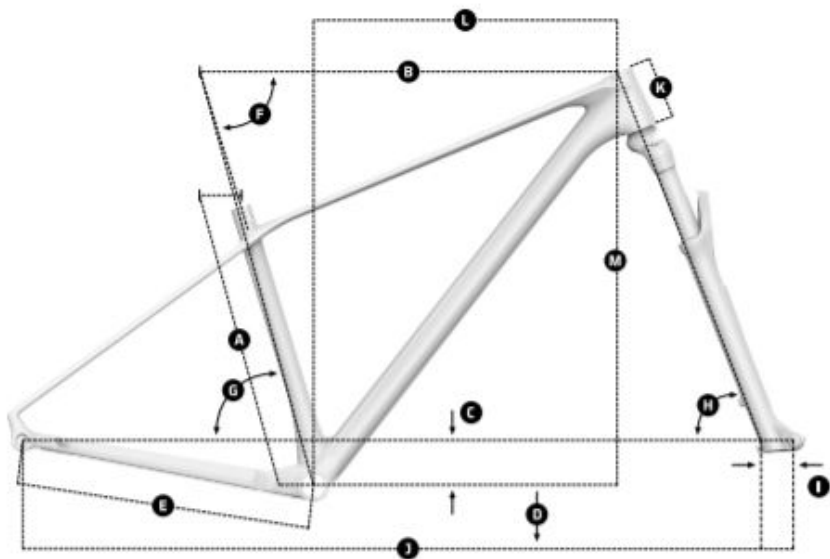

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	590 mm	611mm	632 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	73°	73°	73°	73°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	68.5°	68.5°	68.5°	68.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	425 mm	444 mm	463 mm	477 mm
M Stack	598 mm	602 mm	611 mm	625 mm