

CRAFTY CARBON XR, CARBON/YELLOW/GREY, 2021

obj. č: 010.21279



Sugerowana cena

51.999 zł

Specyfikacje techniczne

produkowane rozmiary

S 380mm / M 420mm / L 450mm / XL 490mm

waga

22,5 Kg

rama

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

widelec

Öhlins RXF 38 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

stery

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

przerzutka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

klamki hamulca

Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

uchwyty

Race Face Aeffect, 165mm

kierownica

Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

mostek

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbore

szttyca

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

siodełko

Fizik Antares R7

piasta przednia

DT 240, Boost 15x110mm, IS 6 bolts

tylna piasta

DT 240, Boost 12x148mm, 24T Ratchet system, IS 6 bolts

łańcuch

Sram NX Eagle, 12s, Powerlock

szprychy

DT Hybrid SP, straightpull

rafki

DT Swiss HX1501 Spline One 29, 30mm internal width, welded aluminum, tubeless ready, 28 spokes

obudowa

Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

zamówienie numer

010.21279

amortyzator

Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

przedni hamulec

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

tylny hamulec

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads


regulacja amortyzatora
C40 compression, R60 rebound

mocowanie przerzutki
Mondraker M068

korba
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

silnik + akumulator
Bosch Performance Line CX Cruise (25Km/h) GEN4,
computer Bosch Kiox, Bosch Powertube 625Wh

Geometria

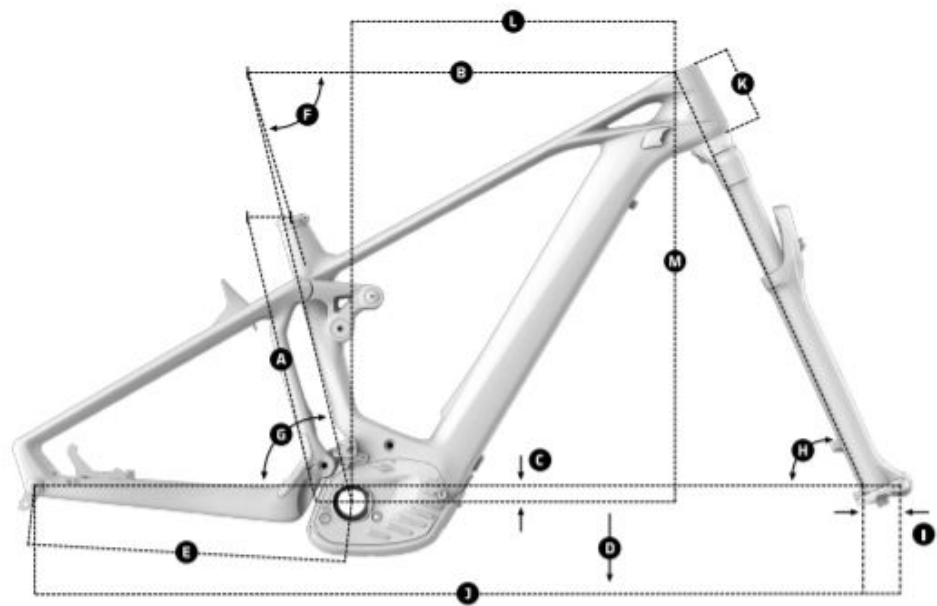

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	615 mm	635 mm	660 mm	680 mm
C Bottom Bracket Drop	-17 mm	-17 mm	-17 mm	-17 mm
D Bottom Bracket Height	358 mm	358 mm	358 mm	358 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	75°	75°	75°	75°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1235 mm	1255 mm	1280 mm	1300 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	632 mm	632 mm	650 mm	650 mm