

# PODIUM CARBON, CARBON/WHITE/RED, 2021

obj. č. 010.21128



## Specyfikacje techniczne

<b>produkowane rozmiary</b> S 390mm / M 420mm / L 470mm / XL 510mm	<b>waga</b> 9,3 Kg
<b>rama</b> Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,	<b>widelec</b> Rockshox SID SL Select RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
<b>stery</b> Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45	<b>przerzutka</b> Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
<b>manetki</b> Sram Trigger GX Eagle, 12s, X-Actuation 1:1	<b>klamki hamulca</b> Sram Level TLM, Direct Link actuation, tooled reach adjust, lever pivot bushings
<b>uchwyty</b> Truvativ Stylo 7K Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm	<b>support</b> Sram DUB BSA, sealed bearings, 73mm
<b>kierownica</b> Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm	<b>mostek</b> MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm
<b>sztyca</b> Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	<b>siodełko</b> Fizik Antares R7
<b>piasta przednia</b> DT 370, Boost 15x110mm, IS 6 bolts	<b>tylna piasta</b> DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, XD freehub
<b>łańcuch</b> Sram NX Eagle, 12s, Powerlock	<b>kaseta</b> Sram XG-1275, 10-50T, 12s
<b>szprychy</b> DT Champion, straightpull	<b>rafki</b> DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes
<b>obudowa</b> Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead	<b>zamówienie numer</b> 010.21128
<b>przedni hamulec</b> Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	<b>tylny hamulec</b> Sram Level TLM, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

**owijka**

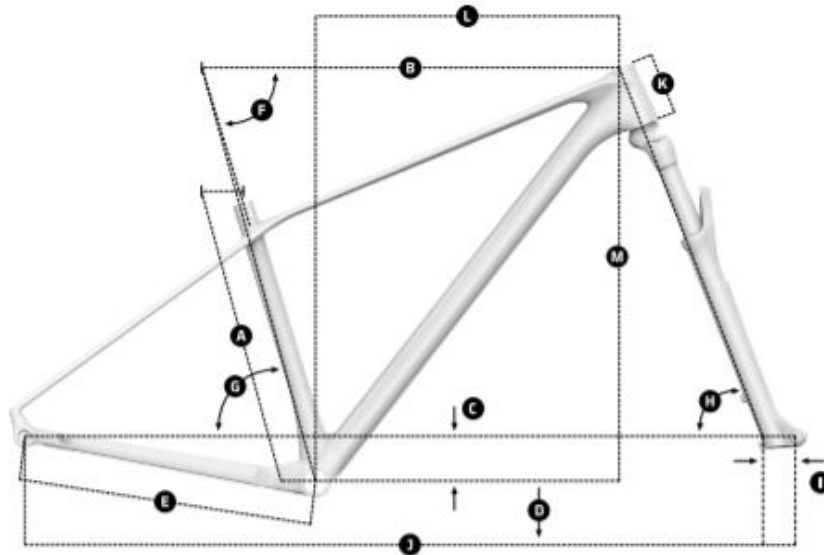
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

**korba**

34T, CNC-machined alloy, X-SYNC 2

**mocowanie przerzutki**

Sram UDH

**Geometria****GEOMETRY**

Size	S	M	L	XL
<b>A</b> Seat Tube Length	390 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	590 mm	611mm	632 mm	650 mm
<b>C</b> Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
<b>D</b> Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
<b>E</b> Chainstay Length	430 mm	430 mm	430 mm	430 mm
<b>F</b> Seat Tube Angle, Actual	73°	73°	73°	73°
<b>G</b> Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
<b>H</b> Head Tube Angle	68.5°	68.5°	68.5°	68.5°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
<b>K</b> Head Tube Length	85 mm	90 mm	100 mm	115 mm
<b>L</b> Reach	425 mm	444 mm	463 mm	477 mm
<b>M</b> Stack	598 mm	602 mm	611 mm	625 mm