

PODIUM CARBON R, CARBON/YELLOW/GREEN, 2021

obj. č: 010.21025



Sugerowana cena

25.999 zł

Specyfikacje techniczne

produkowane rozmiary

S 390mm / M 420mm / L 470mm / XL 510mm

waga

8,9 Kg

rama

Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,

widelec

Fox 32 29 Float FIT4 EVOL Step Cast Factory Kashima, 100mm, tapered steerer tube, 15x110mm Boost axle, remote lockout, offset 44mm. Settings: lockout, compression micro-adjustment at low-speed, rebound, air preload

stery

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

przerzutka

Shimano XT M8100, SGS, Shadow+, 12s

manetki

Shimano SLX M7100, Rapid Fire Plus, 12s

klamki hamulca

Shimano XT M8100, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust

uchwyty

Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm

support

Shimano XT MT800 BSA, 68/73mm

kierownica

Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

mostek

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm

sztyca

Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm

siodełko

Fizik Antares R7

piasta przednia

DT 350, Boost 15x110mm, CenterLock

tylna piasta

DT 350, Boost 12x148mm, 36T SL Ratchet system, CenterLock, MS freehub

łańcuch

Shimano Deore M6100, 12s, Quick-link

kaseta

Shimano SLX M7100 10-51T Hyperglide+, 12s

szprychy

DT Competition, straightpull

rafki

DT Swiss XR1700 Spline 29, 25mm internal width, welded aluminum, tubeless ready, 28 spokes

obudowa

Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

zamówienie numer

010.21025

przedni hamulec

Shimano XT M8100, MT800 ICE-Tech 160mm CenterLock rotor, resin pads

tylny hamulec


Shimano XT M8110, MT800 ICE-Tech 160mm CenterLock rotor, resin pads, Flatmount

owijka
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready,
120TPI, folding bead

korba
34T, CNC-machined alloy

mocowanie przerzutki
Sram UDH

Geometria

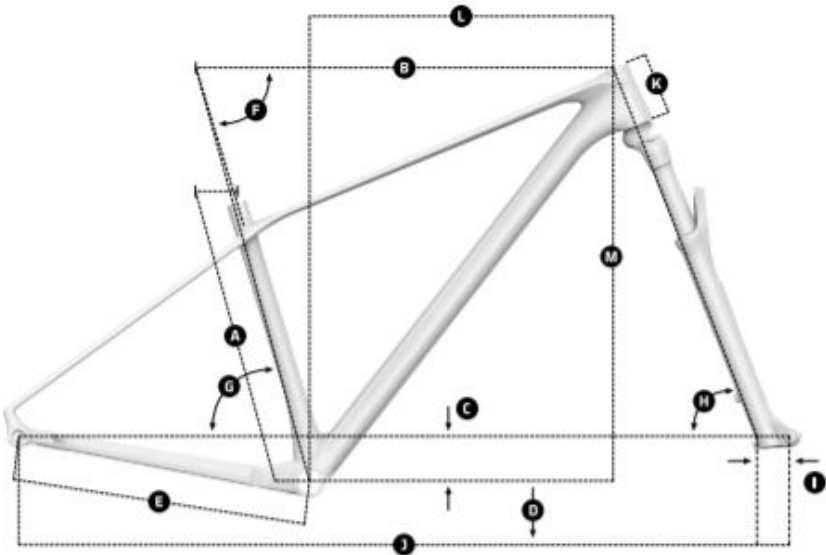

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	590 mm	611mm	632 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	73°	73°	73°	73°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	68.5°	68.5°	68.5°	68.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	425 mm	444 mm	463 mm	477 mm
M Stack	598 mm	602 mm	611 mm	625 mm