

FACTOR 26, SILVER/RED/BLACK, 2021

obj. č: 010.21127



Sugerowana cena

10.399 zł

Specyfikacje techniczne

produkowane rozmiary

One size 350mm

waga

13,6 Kg

rama

Factor 26 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 120mm travel, one piece bolt-on upper link, QR 9mm rear axle, 73mm BSA bottom bracket, HHG internal cable routing, dedicated 1x drivetrain design

widelec

X-Fusion Velvet RL2 26, 120mm, Motion control, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload

stery

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

przerzutka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

manetki

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

klamki hamulca

Shimano M4100, alloy lever, tooled reach adjust

uchwyty

Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm

support

Sram DUB BSA, sealed bearings, 73mm

kierownica

SDG Slater, double butted 6061 alloy, rise: 20mm, width: 650mm, 5 backsweep, 8 upsweep, 31.8mm bar bore with 4x19mm shims SDG Slater JR D19mm, 115mm

mostek

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm bar bore

szttyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm

siodełko

SDG Fly JR

piasta przednia

Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts

tylna piasta

Formula DC22LW 9x135mm, cup cone ball bearings, IS 6 bolts

łańcuch

Sram SX Eagle, 12s, Powerlock

kaseta

Sram PG-1230, 11-50T, 12s

szprychy

CN round stainless steel

rafki

MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes

obudowa

Kenda Booster 26x2.4 single compound 30TPI, wire bead

zamówienie numer

010.21127

amortyzator

X-Fusion 02PRO R, 210x55mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings

przedni hamulec

Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads

tylny hamulec

Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads

owijka


Kenda Booster 26x2.4 single compound 30TPI, wire bead

regulacja amortyzatora
A-Tune light compression

korba
30T, steel, X-Sync

mocowanie przerzutki
Mondraker M073

Geometria

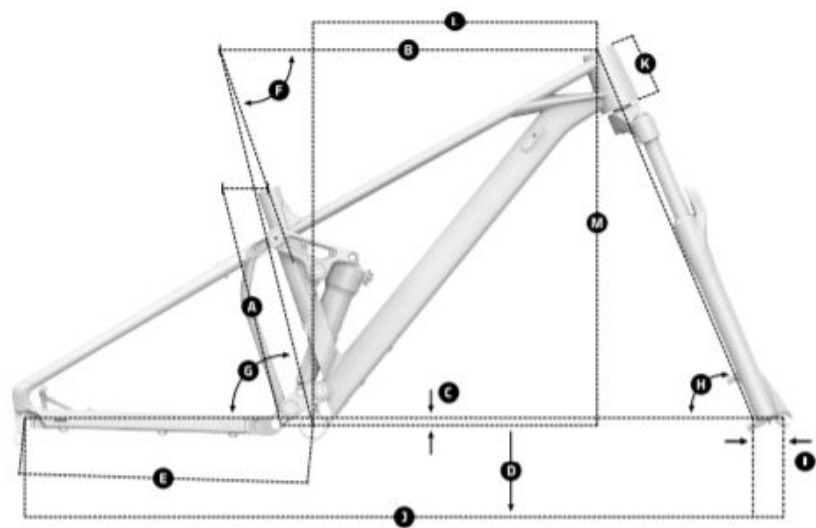

GEOMETRY

Size	26"	
A	Seat Tube Length	350mm
B	Top Tube Length	550mm
C	Bottom Bracket Drop	-10 mm
D	Bottom Bracket Height	320 mm
E	Chainstay Legth	420 mm
F	Seat Tube Angle, Actual	71°
G	Seat Tube Angle, Effective	76°
H	Head Tube Angle	67°
I	Fork Offset	41 mm
J	Wheelbase	1105 mm
K	Head Tube Length	90 mm
L	Reach	415 mm
M	Stack	545 mm