

CHRONO, BLACK/RED/BLUE, 2021

obj. č: 011.21001

Sugerowana cena

6.759 zł

Aktualna cena

5.399 zł



Specyfikacje techniczne

produkowane rozmiary

S 395mm / M 430mm / L 470mm / XL 520mm

waga

12,7 Kg

rama

Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle

widelec

RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload

stery

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

przerzutka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

manetki

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

klamki hamulca

Sram Level, tooled reach adjust, lever pivot bushings

uchwyty

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

support

Sram DUB BSA, sealed bearings, 73mm

kierownica

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

mostek

Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbore, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm

sztyca

Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm

siodełko

Mondraker XC Series, steel rail

piasta przednia

Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts

tylna piasta

Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub

łańcuch

Sram SX Eagle, 12s, Powerlock

kaseta

Sram PG-1210, 11-50T, 12s

szprychy

CN round stainless steel

rafki

MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes

obudowa

Kenda Slant Six 29x2.20, wire bead

zamówienie numer

011.21001

przedni hamulec

Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

tylny hamulec


Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

korba

34T, steel, X-Sync 2

mocowanie przerzutki

Mondraker M074

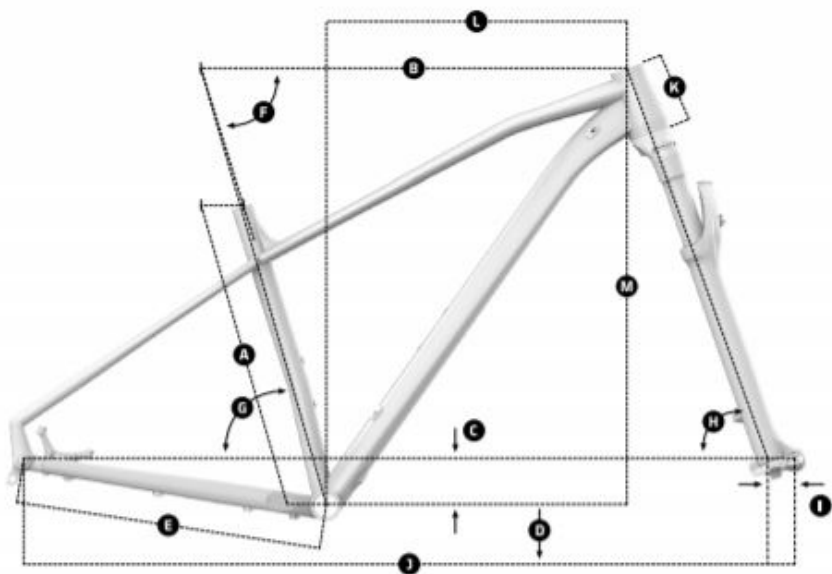

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1087 mm	1107 mm	1127 mm	1148 mm
K Head Tube Length	100 mm	100 mm	110 mm	125 mm
L Reach	406 mm	426 mm	444 mm	460 mm
M Stack	618 mm	618 mm	628 mm	642 mm